





Temperatur - Lämpötila - Temperature - Sıcaklık -
Температура - θερμοκρασία

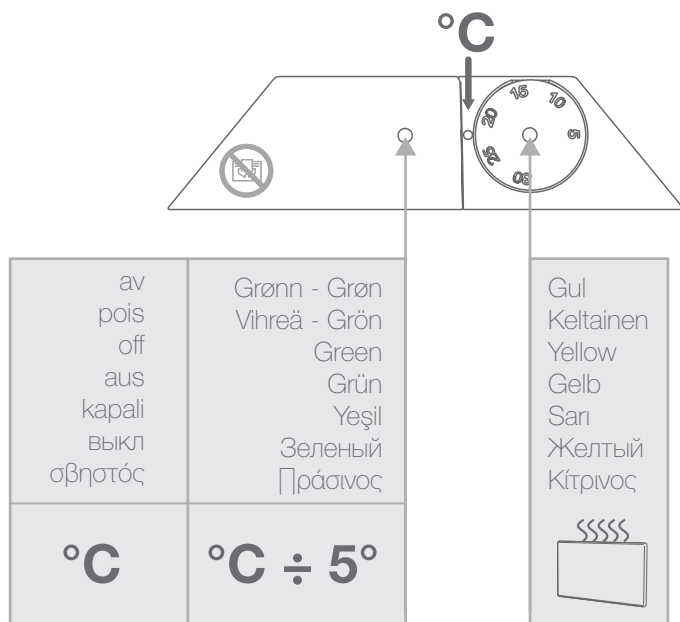

80390189

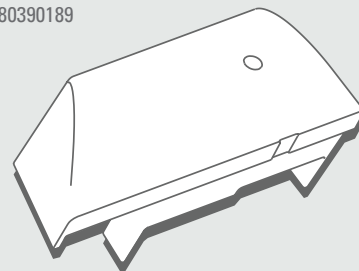


Dimplex® 1Z


Styretrådmottaker - Styreledningsmodtager
Ohjausjohdolliset vastaanottimet - Mottagare för styrtråd
Control wire receiver - Steuerleitungsempfänger
Kontrol kablosu alıcı - Приемник Кабель управления - Δέκτη Καλώδιο Ελέγχου



1.
av, pois, off,
aus, kapalı,
выкл,
σβηστός



Dimplex 1Z



Dimplex Front
Dimplex Top



(N) Produktet skal leveres til gjenvinning ved endt levetid.
(DK) Efter endt levetid må produktet indleveres til genbrug.
(F) Lämmitinlaitetta on toimitettava kierrätykseen.
(S) När produkten ska kasseras lämnas den till återvinning.
(GB) At the end of its service life, the product must be recycled.
(DE) Am ende der Lebensdauer, geben Sie das Produkt zum Recycling zurück.
(TR) Kullanım Ömrü sonunda cihaz geri dönüşüm servislerine teslim edilmelidir.
(RU) По истечении срока службы изделие должно быть отправлено на утилизацию.
(GR) Στο τέλος της ζωής του, το προϊόν θα πρέπει να ανακυκλώνεται.



(N) For å unngå overoppheting må ovnen ikke tildekkes.
(DK) For at undgå overophedning, må ovnen ikke tildækkes.
(FI) Ylikuumenemisvaaran vuoksi lämmitintä ei saa peittää.
(S) För att undvika överhettning får elementet inte övertäckas.
(GB) To avoid overheating, the heater must not be covered.
(DE) Um Überhitzung zu vermeiden, die Heizung nicht abdecken.
(TR) Aşırı ısınmanın önüne geçmek için ısıtıcının üzeri kapatılmamalıdır.
(RU) Во избежание перегрева не накрывайте обогреватель.
(GR) Για να αποφύγετε την υπερθέρμανση, μην καλύπτετε το θερμοσίφωνα.




GlenDimplex
NORDIC




Havnegata 24, box 16, NO-7501 Stjørdal,
NORWAY
www.glendimplex.no
email@glendimplex.no

Dimplex® 1Z

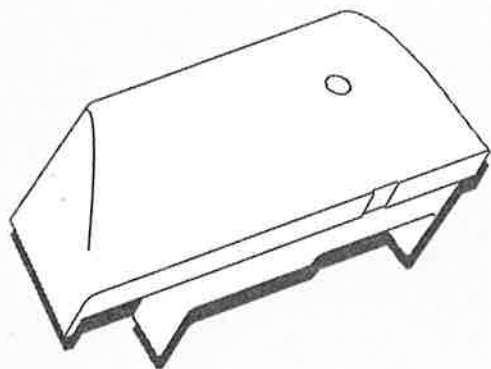



Stytrådmottaker - Styreledningsmodtager
 Ohjausjohdolliset vastaanottimet - Mottagare för styrtråd
 Control wire receiver - Steuerleitungsempfänger
 Kontrol kablosu alıcı - Приемник Кабель управления - Δέκτη Καλώδιο Ελέγχου

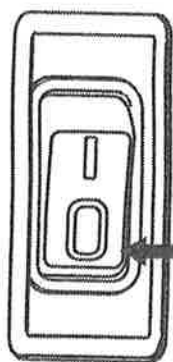

av, pois, off,
 aus, kapali,
 ВЫКЛ,
 σβηστός



30s

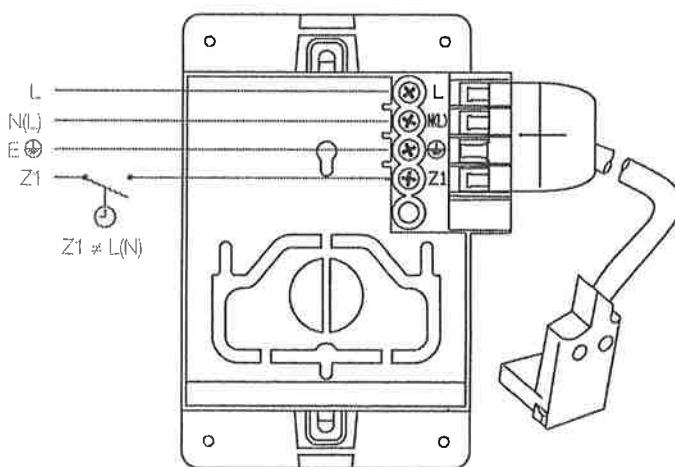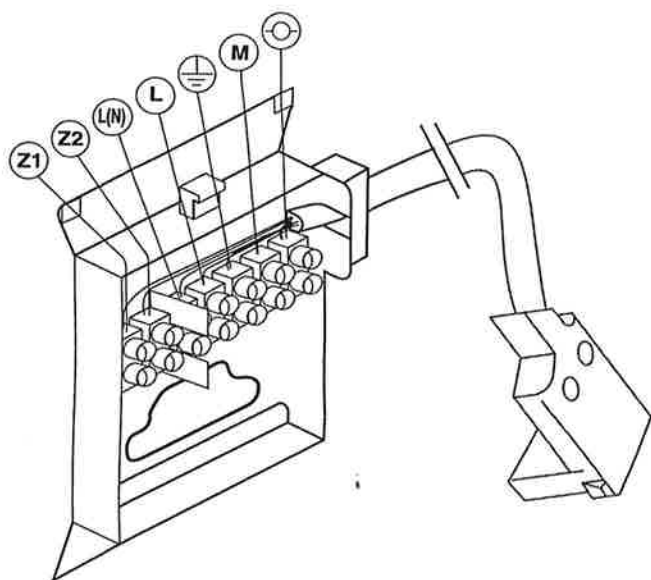

Z = sort-musta-black-negro-schwarz-чёрный-μαύρο;
N = blå-sininen-blue-azul-blau-синий-μπλέ;
L = brun-ruskea-brown-marrón-braun-коричневый-καφέ;
E = gul/grønn-keltainen/vihreä-yellow/green-amarillo/verde
 gelb/grün-жёлтый/зелёный-κίτρινο/πράσινο;
M = grå-harmaa-grey-серый-γκρι;