



BASIC D

Stationary or mobile convector with energy-saving features



Caster kit for mobile use
(optional)

ADVANTAGES

BASIC D is available in 5 power ratings from 500 to 2500 W and is ultra compact.

The front air outlet improves the distribution of heat into the room.


Electronic controls with 3 preset programmes and open window detection.

Quality French design and manufacturing.

BASIC D



The **one-piece** aluminium heating element transmits heat silently with efficiency and speed.

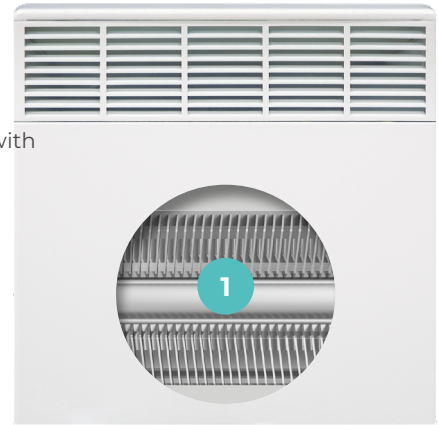

Electronic controls




Smooth white satin soft to the touch and easy to clean finish ral 9003

SAVINGS


- Precise electronic room temperature control
- Open window detection
- Control locking
- Temperature calibration
- Integrated daily and weekly programming: 3 pre-set programmes
- On/off switch

Thickness: 104 mm

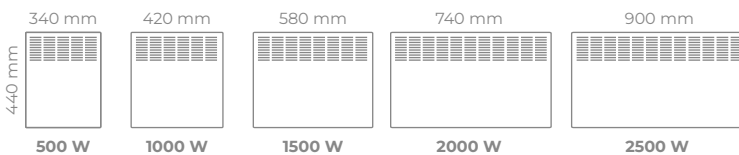

Dimensions and power ratings			
POWER (W)	L X H X T* (MM)	WEIGHT	REF. WHITE
500	340 x 440 x 104	2,7	E137111
1000	420 x 440 x 104	3,3	E137113
1500	580 x 440 x 104	4,4	E137115
2000	740 x 440 x 104	5,6	E137117
2500	900 x 440 x 104	7,0	E137118
Castor kit (optional)			A691600

* Depth: when wall-mounted, including self-gauging H bracket 1.5 m power cord with European plug



Packaging: **100% cardboard** for easy recycling on worksites



Registered headquarters: 28 Rue de Verdun, 92150 Suresnes - France

Customer services: export@groupe-intuis.fr +33 (0)9 78 45 10 26