



**MADE IN
FRANCE**

GLASSANCE

Electric radiator with active glass surface.

Dual emission for a comfortable temperature.



Caster kit for mobile use


ADVANTAGES

Glassance has a stylish front panel consisting of 6 mm thick inertial tempered glass, combined with a screen-printed heating film that provides permanent radiation. The heating system also features a single-unit aluminium heating element at the back to ensure a rapid increase in temperature.

New electronic control panel with:

- Backlit LCD display
- 3 preset programmes and 3 flexible programmes.
- Property manager functions: pin code control lock and set temperature.

GLASSANCE

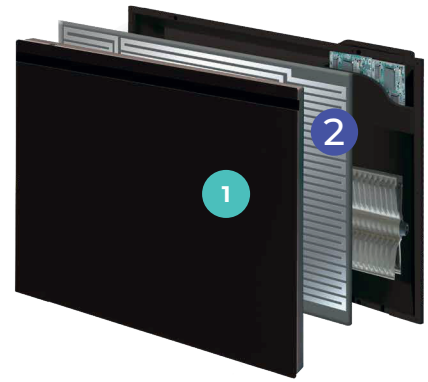

Comfort & technology

- 1 A 6 mm thick tempered glass decorative facade** with a screen-printed heating film that radiates 20% of its power from the front panel.
- 2 A single-unit aluminium reactive emitter** provides the remaining 80% of the power for rapid temperature increases and to maintain utmost comfort in winter.




New user interface with backlit LCD display


SAVINGS

- Backlit LCD display
- Accurate to a 10th of a degree.
- Behavioural indicator.
- Open window detection.
- Property manager functions:
 - quick locking
 - pin code locking
 - range setting
- Hotel function:
 - settings lock and range setting
- Temperature calibration
- Daily and weekly programming:
 - 3 pre-set programmes
 - 3 flexible programmes
- Six-command control cable; model without plug only.
- 6-hour power back-up to avoid having to reset the time in the event of a power cut

Thickness: 95 mm

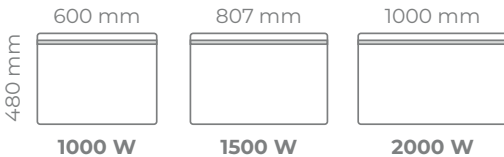

Available colours



Power (W)	H (mm)	L (mm)	D (mm)*	Weight (kg)	References: smooth white	References: high-gloss black
Glassance (with plug)						
1000	480	600	95	8,5	E209113	E209123
1500	480	807	95	11,5	E209123	E209125
2000	480	1000	95	14,0	E209115	E209127
Glassance (without plug)						
1000	480	600	95	8,5	E208113	E208123
1500	480	807	95	11,5	E208113	E208125
2000	480	1000	95	14,0	E208115	E208127
Castor kit (optional)					N090061	N090062

* Depth: when wall-mounted, including self-gauging H bracket
1.5 m power cord with or without plug depending on version



Packaging: 100% cardboard for easy recycling on worksites



Registered headquarters: 28 Rue de Verdun, 92150 Suresnes - France

Customer services: export@groupe-intuis.fr +33 (0)9 78 45 10 26